



sea state
cci

User Requirement Document (URD)

version 3.1, 5 October 2024

--	--	--

Contents

Contents	2
List of Acronyms	4
1. Introduction	5
1.1 Purpose	5
1.2 Scope	6
1.3 Description of the main sea state variables	7
1.4 Document structure	8
2. Review of previous user requirements	10
2.1 Sea states as part of the Earth system	10
2.2 EUMETSAT Observation Requirements for Nowcasting in 2015-2025	10
2.2.1 Observational performance level	12
2.2.2 Priority of the requirements	12
2.3 Requirement defined by GCOS-245 (the 2022 ECV requirements)	13
2.4 Proposition for updating requirements	14
3. Application areas for sea state climate data	15
3.1 Climate research and engineering applications	15
3.2 Modelling activities	16
3.3 Remote sensing	16
3.4 Air-sea fluxes	16
3.5 Other wave-related effects in the Earth System	17
4. User surveys	18
4.1 Introduction	18
4.2 First user survey	18
4.2.1 Users involved in the survey	18
4.2.2 Field of applications	19
4.2.3 The importance of various sea state parameters	19
4.2.4 Temporal coverage and spatial resolution	20
4.2.5 Interest in sea state data	21
4.2.6 Interest in other Essential Climate Variables	22
4.2.7 Participation to the User Consultation Meeting and training session	22
5. Consolidated list of User Requirements	23
5.1 Top level requirements	23
5.2 Specific data requirements	24
6. References	28
Appendix 1 - Open comments from survey participants	31

Author	Approved	Signature	Date
Fabrice Ardhuin	Annabelle Ollivier		15/03/2024
ESA Acceptance			

Issue	Date	Comments
3.0	March 2024	First version for ESA approval
3.1	October 2024	Update to address comments from ESA review

List of Acronyms

COWCLIP	Coordinated Ocean Wave Climate Project
CCI	Climate Change Initiative
ECV	Essential Climate Variable
GCOS	Global Climate Observing System
LRM	Low Rate Measurement
OASIS	Observing Air–Sea Interactions Strategy
SAR	Synthetic Aperture Radar

1. Introduction

1.1 Purpose

The purpose of the *User Requirements Document* is to provide a complete set of individual requirements and constraints to meet the needs of the Climate Research Community for ECV data products related to sea state. We also note that the definition of the present wave climate may be just as important at the detection of its evolution. More generally, there are many users of the same wave data that do not belong to the climate research community, and their needs are considered here too.

Who are the users for Sea State CCI data? As specified by ESA and following up on the GCOS-200 document, in particular section 4 “the broader relevance of climate observations” we have identified different user communities that are part of the scientific, research, and operational organisations from the UNFCCC countries responsible for climate research, modelling, climate service development, assessment and prediction within nationally and internationally funded programmes.

- COWCLIP
- wave modelling community, including those producing reanalyses
- marine energy R&D
- OASIS: air-sea interactions research community (Cronin et al. 2023)

These users are being engaged to guide the CCI phase 2 activity, to independently validate their results and to test ECV products within climate research and climate service activities, as part of the project.

In most cases these are “intermediate users” that use sea state data as part of their activities to provide information (e.g. wave model reanalyses) for a broader range of downstream users. In particular, the sea state Level 2 data by itself is generally too coarse to be directly useful for many critical applications: extreme value analysis for the design of coastal or offshore structures rely on well resolved time series obtained from in situ or model data. However, Sea State CCI data are critical for validating and calibrating these models, and can be also very useful for assimilation in reanalyses (e.g. Law-Chune et al. 2021).

What variables could we cover?

As stated in GCOS-200 *“Sea state is best known for its impacts on marine safety and transport, coastal erosion and damage to coastal and offshore infrastructure. It is also a substantial modifier of air–sea exchanges of momentum, kinetic energy, moisture and gases. Waves also impact beach erosion, storm-related water damage (waves are added to storm surge), surface albedo and transport of surface particles, including larvae and contaminants, such as oil. Waves can also modify the growth or decay of sea ice.*

Taking that statement at face value we may want to extend the “usual” sea state variables - those that are derived from the surface elevation properties - as detailed in section 1.3 below - and push for new variables, for example foam properties using passive radiometers such as SMOS, or the “roughness” that goes into the wind stress and other air-sea fluxes. Also a

number of other sea state parameters are important for climate research, such as the sea state bias in altimeter data or the directional slope variance tensor for sunglint in ocean color images. While keeping these in mind, we have to strike a balance between what can be easily observed (starting with the significant wave height H_s) and what may be good proxies for all applications.

As a result the present document, guided by user input, is strongly focused on usual sea state variables and their long term variability and evolution, while keeping an eye on all uses of wave data. The biggest headlines about sea states and climate have been associated with publications on observed trends (Young et al. 2011) that do not always agree with modelled trends. These are now reconciled, thanks to a better understanding of measurement uncertainties and sampling limitations (Casas-Prat et al. 2024). More recent efforts about the wave contribution to total sea level (Melet et al. 2018) have also stirred controversy (Aucan et al. 2019) and highlighted the need not only for sea state data but also for shared expertise about how to use it. In the context of coastal sea level, the “energy period” $T_{m0,-1}$ is a key variable for scaling coastal run up and submersion (Dodet et al. 2018, 2019).

One of the goals in wave climate research is to better *understand* the natural variability of sea states and better define the statistics of the extremes (which are so important for engineering design application and natural hazard mitigation) in a context of global change with positive and negative drifts. And even where the wave height trends may be negative, defining uncertainties is critical for the understanding of total sea level changes. Since wave parameters are driven by the wind and to a lesser extent sea ice and currents, providing a co-located proxy of the wind speed is an important task.

1.2 Scope

This URD identifies, analyzes and assesses the requirements for sea state data specified by the sea state user community, with a focus on the modelling and climate research community. This URD is based on a literature review, three dedicated user surveys (two were performed as part of Phase 1 in 2018 and 2020, and a third was disseminated in February 2024), and the analysis of the requirements by the Climate Research Group within the consortium and representatives from the Climate Modelling User Group (CMUG).

The requirements will incorporate the relevant sea state parameters needed by the research community, with focus on product, accuracy, coverage, resolution and stability of the measurements, error characterisation, quality flags, metadata (including processing algorithms), product formats, grid. The requirements for validation data from non-space platforms are also addressed. The requirements for sea state ECV data include several sea state parameters in addition to the H_s and spectral partition products.

The requirements are defined for a number of applications in particular climate modelling including model development, model validation, model initialisation, boundary layer definition and data assimilation, and climate research based on time series analysis. User requirements from other application areas such as operational marine weather forecasting, ocean engineering, marine transportation and offshore operations, remote sensing and

seismology are also included. The requirements are divided in two categories: (1) minimum requirements to sea state data in order to be useful for the different applications (“must have”), and (2) target requirements, which are expected to be obtained by EO data after careful validation and/or merging with non-EO data (“nice to have”). The requirements will also account for foreseen needs as sea state and climate models become further developed.

This document mainly focuses on the following Sea State variables: **significant wave height** and **energy period**, as these are some of the most commonly used variables. For example, these two variables will be used in the climate case studies performed in Phase 2 of the Sea state CCI project. Since the Normalized Radar Cross Section (NRCS) is an important proxy for the wind speed and thus useful for analysing wave variability (trends ...), we will also give some indications on the NRCS, even though it is not itself a geophysical quantity: the closest geophysical quantity for near-nadir altimetry is the **mean square slope**.

1.3 Description of the main sea state variables

Significant wave height (Hs) is the most common sea state parameter and is defined as 4 times the standard deviation of the surface elevation in a record that is typically 20 minutes long. Hs is used in all applications, from navigation safety to coastal engineering. The acronym **SWH** is also used for that same quantity in most remote sensing publications.

Besides Hs, the time and/or spatial scales of the waves are of interest because they determine the energy flux associated to the wave field (proportional to the wave period for linear waves), forces on structures, the extent of the coastal run-up, among others. Also, the direction of wave propagation is relevant for many aspects including the impact on shorelines and navigation hazards. More details can be found in Ardhuin et al. (2019).

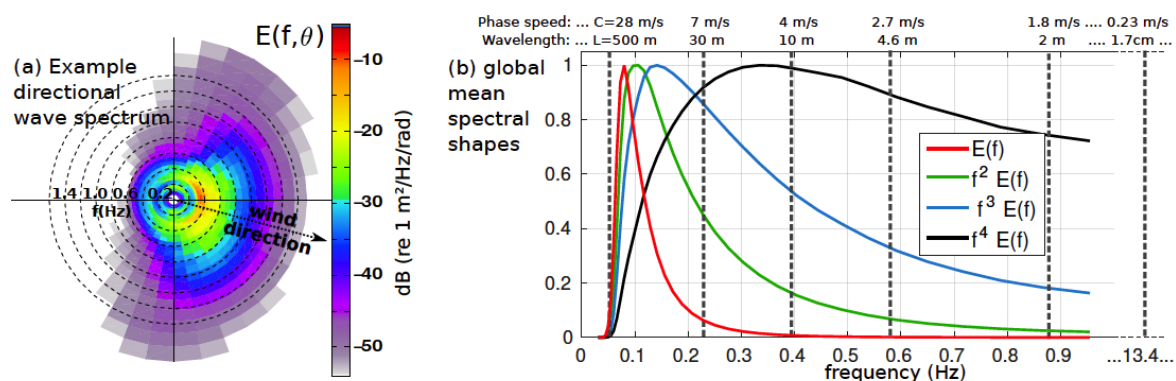


Figure 1: (a) example of wave spectrum $E(f, \theta)$ that represents the distribution of the surface elevation variance across wave frequencies and directions, obtained from stereo-video imagery (Leckler et al. 2015) (b) Spectral shapes of global averages distributions of elevation $E(f)$, wave-induced velocities $f^2 E(f)$, Stokes drift $f^3 E(f)$ – this simplified expression assumes all waves propagate in the same direction – and acceleration $f^4 E(f)$, which is proportional to surface slope in the case of linear waves. Each spectrum was normalised by its maximum value.

Hence the sea state is generally described by the **directional wave spectrum $E(k, \theta)$** . Most sea state variables of interest can be derived from the spectrum. These include,

- The wavenumber spectrum $E(k) = \int_0^{2\pi} E(k, \theta) d\theta$
- frequency spectrum $E(f) = \int_0^{2\pi} E(k, \theta) dk/df d\theta$, in which dk/df is defined by the dispersion relation (linear wave theory is generally used for this: in general this dispersion relation requires a knowledge of the wave direction and the effective current¹ velocity vector **U**)

$$(2\pi f) = [g k \tanh(kD)]^{1/2} + \mathbf{k} \cdot \mathbf{U}$$

Hence, when currents cannot be neglected, it is not straightforward to transform a frequency spectrum $E(f)$ as measured by a moored buoy, to a wavenumber spectrum $E(k)$ as measured by a space-borne radar.

Other moments of interest include

- directional moments $a_n(f) = \int_0^{2\pi} \cos(n\theta) E(k, \theta) dk/df d\theta / E(f)$ and
 $b_n(f) = \int_0^{2\pi} \sin(n\theta) E(k, \theta) dk/df d\theta / E(f)$
- Moment periods $T_{mp,q}$, in particular the mean period $T_{m0,2}$ and the **energy period** $T_e = T_{m0,-1}$ defined as $T_{mp,q} = \left[\frac{\int_0^{fmax} E(f) f^q df}{\int_0^{fmax} E(f) f^q df} \right]^{1/q}$ that can be sensitive to the maximum frequency used in the integration
- the mean square slope $mss = \int_0^{\infty} k^2 E(k) dk$. We note that the mean square slope is tightly related to the **radar NRCS** (e.g. Nouguier et al. 2016), and to the **wind speed** (Munk 2009).
- partitions and their moments (Gerling 1992, Hanson and Phillips 2001): the spectrum is separated in different regions (the partitions for which the energy and moments are computed leading to partition heights, periods ...)

Relevant directional parameters are computed from the directional moments for a particular range of frequencies or spectral partition, e.g., the mean direction and spread from the first moments at each frequency (Kuik et al. 1988)

- $[\cos(\theta_1(f)), \sin(\theta_1(f))] = [a_1(f), b_1(f)]$ and $\sigma_1 = [2 - (a_1^2(f) + b_1^2(f))]^{1/2}$

Besides **Hs**, all other parameters are estimated indirectly from remote sensing data. We also note that the full spectrum **E(k,θ)** is generally not accessible in routine in situ measurements, only directional moments are available from which a directional spectrum may be estimated (e.g. Lygre and Krogstad 1986).

¹ "Effective" in the sense that it is the velocity that advects the phase of the wave train, and is generally a function of the current profile and the wavenumber (e.g. Stewart and Joy 1974, Andrews and McIntyre 1978, Kirby and Chen 1989).

1.4 Document structure

This User Requirements Document is organised into the following sections:

Section 2. Review of previous user requirements

Section 3. Application areas for sea state climate data

Section 4. User survey

Section 5. Consolidated requirements list

Section 6. References

2. Review of previous user requirements

2.1 Sea states as part of the Earth system

Sea state indeed affects all activities at sea (shipping, oil & gas exploration and exploitation, fish farming) on the coast (harbours, coastal defence, marine renewable energy systems, recreational uses). Many activities require more and more accurate information from extremes (design criteria for structural failure) through to calm windows (for maintenance of offshore wind farms). Beyond activities directly linked to the ocean, sea states are of general interest in the Earth system. For example, ocean waves largely define air-sea fluxes and upper ocean mixing (Jähne and Haußecker 1998, Veron 2015, d'Asaro 2016), sediment resuspension, transport and coastal geomorphology. Waves are also the source of most of the recorded seismic noise that can be used for solid Earth monitoring (e.g. Shapiro et al. 2005) and wave climate analysis (Bernard 1990, Grevemeyer et al. 2000, Aster et al. 2023). Although the relevant variables will vary from one application to another, the significant wave height and energy period can be a proxy for other wave-related variables.

In return, extreme waves and their trace in the geological record are used as evidence for past storminess using paleo-shorelines (Bouchette et al. 2010), ripple marks (Allen et Hoffman 2005) or wave-transported boulders (Hansen et al. 2016). It is thus very important to link extreme sea states to these geological marks under present climate conditions from shoreline features (Ashton et al. 2001) to ripples (e.g. Ardhuin et al. 2002), and boulders (Kennedy & al. 2016, Autret et al. 2016, Cox 2018), in order to better understand the geological record and past climates.

Monitoring and forecasting of sea states is closely integrated with ocean and atmospheric observations and modelling. Satellite EO data play an essential role in observing atmospheric and ocean variables, including sea states.

Observations of the ocean are required for monitoring of climate and the environment at seasonal-to-interannual-to-decadal time scales. In particular, the availability of operational ocean observations is prerequisite for quality weather and ocean state forecasts. Already today, global and regional numerical weather prediction models, seasonal to inter-annual forecasts and climate models assimilate ocean observations to generate initial conditions or boundary conditions.

Requirements for sea state data are therefore closely linked to requirements for ocean and atmospheric observations and modelling, with a recent strong interest in the polar regions. Several user requirement documents have been prepared for ocean and sea ice observation from satellites. The following sections give an overview of some of these documents.

2.2 EUMETSAT Observation Requirements for Nowcasting in 2015-2025

As listed in Golding et al. (2003), the impact of improvements to observations has been assessed for the forecast service requirements using appropriate nowcasting and very short range forecasting techniques and have then been analysed to identify the key

breakthroughs. The dominant forecasting method in 2015-2025 is expected to be Numerical Weather Prediction (NWP) which by then will be able to resolve the scales of interest in very short range forecasting.

The respective main observational requirements for applications of the above user groups are summarised in this table:

	A	B	C	D	E	F	G	H
1	Title	Sub-Title	Required variable	Conditions (1)	Applications	Nearest WMO/CEOS parameter	WMO/CEOS code	Required Altitude Range (2)
52			Ocean					
53	Observation & Extrapolation	Ocean	Sig wave ht		Marine transport	Significant wave height	72	surface
54	Observation & Extrapolation	Ocean	Sig wave ht	near shore	Marine construction	Significant wave height	72	surface
55	Observation & Extrapolation	Ocean	Wave period		Marine transport	Dominant wave period	73	surface
56	Observation & Extrapolation	Ocean	Wave direction		Marine transport	Dominant wave direction	74	surface
57	Observation & Extrapolation	Ocean	Surge height	near shore	Life - Coastal flooding	Sea level	75	surface

I	J	K	L	M	N	O	P	Q	R	S	T	U	V
Accuracy threshold (3)	Accuracy optimum (3)	dx threshold	dx optimum	dz threshold	dz optimum	dt threshold	dt optimum	delay threshold	delay optimum	Priority level	Breakthrough level (if any)	Current Observing Techniques	Level met
0.5m	0.1m	50km	1km	-	-	6hr	1hr	2hr	30min	VH	0.5m / 10km / 1hr	Surface in situ or HF radar	N
0.2m	0.1m	10km	1km	-	-	3hr	1hr	1hr	5min	H	0.2m / 10km / 1hr	Surface in situ or HF radar	N
1s	0.5s	50km	1km	-	-	6hr	1hr	2hr	30min	H	1s / 10km / 1hr	Surface in situ or HF radar	N
20°	10°	50km	1km	-	-	6hr	1hr	2hr	30min	M	20° / 10km / 1hr	Surface in situ or HF radar	N
20cm	10cm	50km	1km	-	-	6hr	1hr	2hr	30min	VH	0.2m / 10km / 1hr	Surface in situ	[U]

Table 2.1: requirements as defined by Golding et al. (2003).

Those requirements were extensively documented before and examples of respective discussions can be found in the position papers produced by the EUMETSAT Application Expert Groups during the Meteosat Third Generation (MTG) definition process (Golding et al. 2003).

Furthermore, our requirements consider and where necessary, build upon, those contained in the following documents:

- GMES, Sentinel 3 (ESA 2007)
- GCOS (2003, 2006, 2011)

All user groups continue to require comprehensive, accurate and higher resolution oceanographic satellite observations, driven by the increase in model resolution and the number of assimilated variables.

2.2.1 Observational performance level

Three performance levels are defined as follows:

- 1) **Threshold** is the limit below which the observation becomes ineffectual and is of no use for the targeted application
- 2) **Breakthrough** level represents the level beyond which a significant improvement in the target application is achieved.
- 3) **Objective** is the maximum performance limit for the observation, beyond which no significant improvement in the targeted application is achieved.

Accuracy: For operational meteorological applications, the accuracy is the root mean square (r.m.s.) difference between the actual measurement and the truth, inclusive of random errors and bias. This assumes that the main source of error relevant to the 'single level 2' measurement is the random component, the bias error being small enough to not significantly influence subsequent mission definition.

Spatial resolution : Horizontal resolution, Δx - The horizontal resolution is the minimum horizontal spatial scale that must be resolved by the observing system. In most cases, the horizontal resolution is more or less transferable to the resolution of a potential instrument assuming some appropriate sampling which will be finalised during the instrument design phase.

Observation Cycle, Δt : 'Observation cycle' or 'revisit time' is the time elapsed between measurements over a given location. By default, the observation cycle is applicable to the whole Earth surface including the equatorial and polar regions, so that Δt is the time needed to cover the whole Earth surface with at least one measurement. The exception is for high latitude requirements, where the observation cycle of any polar orbiting satellite is specific for the particular latitude and is not applicable to equatorial regions.

Delay , δ

The 'delay' is the time elapsed between observation by the satellite and the availability of the product to the user interface, including the nominal dissemination time.

Additional Notes for Climate Requirements

Some climate requirements are given as a 'level 3' product, which is the average of a series of 'level 2' measurements taken over a time period, Δt , (or sometimes distance, Δx) in order to reduce the uncertainty and sampling variability to a sufficiently low level. The spatial and temporal resolutions then refer to the integration periods. However, despite this, the r.m.s. accuracy for each single 'level 2' measurement is given in the accuracy requirement and not the corresponding averaged product accuracy.

2.2.2 Priority of the requirements

The following codes are used to prioritise the requirements listed in Table 2.1:

Priority 1 (Very High): Mandatory requirements that drive the mission, these requirements are of utmost importance for the success of the mission and must be implemented.

Priority 2 (High): Important requirements that substantially contribute to the success of the mission. Reasonable effort shall be made to implement them.

Priority 3 (Medium): Beneficial requirement that has certain value to the success of the mission, it shall be implemented with minimum effort.

Priority 4 (Low): Requirements which are marginally contributing to the success of the mission. It shall only be implemented on an opportunistic basis. No dedicated effort will be made to implement them.

The priorities assigned in the user requirements table 2.1 are technology free and are thus independent of the availability of appropriate reliable and affordable measurement techniques.

2.3 Requirement defined by GCOS-245 (the 2022 ECV requirements)

Following the work of the SeaState CCI, GCOS has taken up our proposition (Ardhuin et al. 2019) and re-defined the requirements for Hs as follows,

Products			Wave Height
	(*)	Unit	Values
Horizontal Resolution	G	km	1
	B		25
	T		100
Vertical Resolution	G		-
	B		-
	T		-
Temporal Resolution	G	h	1
	B		3
	T		24
Timeliness	G	d	7
	B		30
	T		365
Required Measurement Uncertainty (2-sigma)	G	%	5
	B		
	T		
Stability	G	cm/ decade	1
	B		
	T		10

Table 2.2: requirements defined by GCOS-245: “G” stands for “Goal”, “B” for “Breakthrough” and “T” for threshold.

In table 2.2, a significant difference between GOCS requirements and what was proposed in Ardhuin et al. (2019) is the “2 sigma” specification for the uncertainty instead of 1-sigma only. In addition, Ardhuin et al. (2019) only required 1 km resolution for coastal areas. In the open ocean the variability at the scale of 1 km is often dominated by wave group fluctuations (that change randomly over scales of 1 minute or so): as a result, whereas a buoy may provide a reliable estimate from 1 hour long record, an altimeter will generally require some along-track averaging or filtering at scales much larger than 1 km (e.g. De Carlo and Ardhuin 2024).

We also note that GCOS requirements do not take into account the requirements proposed in Ardhuin et al. (2019) for the energy period ($T_{m0,1}$) and the mean period T_{m02} .

Given that H_s is mostly provided by satellite altimeters and that there are at most 10 altimeters flying at any given time, the spatial and temporal coverage cannot be attained by existing satellite data for the period 2003-2020: for a 1 hour revisit with Low Earth Orbit period of about 30 minutes, it would take 100 satellites even with a 200 km wide swath.

Further, coastal applications generally require even finer resolution, of the order of 100 m in space (Camus et al. 2013, Boudière et al. 2014). Likewise, a higher temporal resolution of the order of 1 hour is necessary where modulation by tides are important. This is particularly relevant for extreme water levels that combine wave run up and storm surges. Today numerical models and/or statistical methods are used to arrive at these resolutions.

However, these requirements are not mutually consistent. The urgency of understanding total sea level at the coast (e.g. Melet et al., 2018) is clearly calling for a stability that matches that of the offshore sea level. Typically, 1 cm increase in offshore H_s gives 0.5 to 1 cm increase in maximum sea level at the coast (Poate et al. 2016, Dodet et al. 2018). It is not unreasonable to ask for 2 mm/year accuracy for H_s when the requirement for regional sea level is at 1 mm/year, with proposals for more ambitious requirements in the context of the Earth Energy Imbalance (Meyssignac et al. 2023). This is particularly important in today's transition where the total ice-shelf melt contribution to sea level rise is still limited to a few centimeters. In the long term, with sea level rise of several meters, the few centimeters to decimeters due to waves will probably be less important.

2.4 Proposition for updating requirements

Based on the analysis of all previous requirements, the evolution of user needs, as further discussed in the next sections, and the need for consistency with other ECVs we propose to update the GCOS-200 numbers for H_s and define requirements for other variables.

	Variable	Frequency	Resolution	Uncertainty	Stability
GCOS-200	H_s	3-hourly	25 km	10 cm	5 cm/decade
GCOS-200	regional sea level	hourly	10 km	1 cm	< 1 mm/year
WMO	H_s	??	??	5-10% or 10 to 25 cm	??
WMO (2017)	$T_{m0,2}$	??	??	0.1 to 1 s	??
WMO (2017)	θ_m	??	??	10 deg	??
this paper	global to regional H_s	3-hourly	25 km	10 cm or 5%	5 cm/decade
this paper	coastal H_s	1-hourly	1 km	10 cm or 5%	< 1 mm/year
this paper	regional $T_{m0,-1}$	3-hourly	25 km	0.2 s	< 0.1 s/decade
this paper	regional $T_{m0,2}$	3-hourly	25 km	0.2 s	< 0.1 s/decade

Table 2.3 : proposed updates to sea state requirements by Ardhuin et al. (2019). “Coastal” can be understood as regions where proximity to land and/or shallow water has a particular impact on the sea state. This thus includes all waters shallower than 100 m, or with a distance to coast shorter than 200 km.

These should be understood as objectives. In particular the objective for trends on H_s should apply to both the mean value and extreme values (up to percentile 99 and 100 year return period).

3. Application areas for sea state climate data

Sea state climate data are used in a wide range of application areas, ranging from climate research activities to marine biology and ecosystems research, management of marine resources, sea transportation, offshore exploration, design and construction of vessels and platforms, impact on indigenous people, insurance, governance and policy making. In this project focus is on climate research and modelling activities, but also requirements to other user groups are considered.

3.1 Climate research and engineering applications

Even though remote sensing data alone cannot reach these resolutions needed in coastal applications, remote sensing is critical for:

- validating and calibrating numerical models offshore (spatially coarse data is generally enough, see e.g. Stopa et al. 2016)
- validating patterns and gradients (in coastal regions, near the ice edge, over current gradients, at the peak of storms...): this has not been applied much so far because:
 - routine altimeter processes are dominated by noise for along-track wavelengths under 80 km or so (Ardhuin et al. 2017b). As new processing techniques have been proposed (e.g. Passaro et al. 2014, Halimi et al. 2016), there are great opportunities to better resolve these variations.
 - few images of wave parameters were available so far. This will change with more widely available SAR (e.g. Gemmrich et al. 2016, Ardhuin et al. 2017a) or sun glitter imagery (Kudryavtsev et al. 2017). In the context of Sea State CCI, the newly available data from IW mode SAR imagery is a game changer, and it will be included in version 4 of the SeaState CCI dataset.

Finally, without even mentioning its evolution with global change, the wave climate, including extremes often defined through H_s statistics associated with long recurrence intervals (i.e. 20, 50, 100yr return period) is a key element in the design and operation of ocean and coastal infrastructures.

The impact of climate change on the wave climate and its applications is a topic of active research and is mostly limited by the poor knowledge on trends and variability of extreme sea states (e.g. Bitner-Gregersen et al. 2013).

As a result, a clear requirement is a validation of the highest values of H_s for all regions of the world ocean. Hanafin et al. (2012) used wind speeds and the periods of radiated swells as a consistency check on the 20.1 m H_s found in the North Atlantic storm Quirin. Cardone et al. (2015) chose to filter the data without any discussion on the filter properties.

Due to the particular temporal sampling of waves measured by altimeters, the statistical distribution must be corrected for sampling biases (Izaguirre et al, 2011). Figure 3.1 shows an example with the 10-year H_s return values as derived from the altimeter record, which is

within 1 m of the same parameter derived from a model hindcast sampled at the satellite measurements in time and space, but differs by up to 20% from a full model time series.

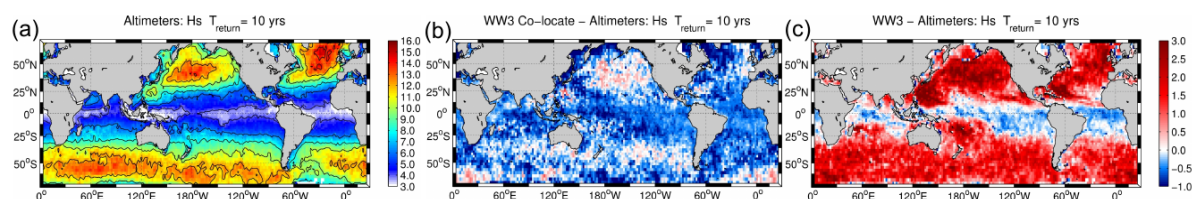


Figure 3.1: (a) Estimation of a 10-year return period value of H_s using the GEV distribution from the altimeters, (b) difference between the altimeters and colocated WW3 data, (c) difference for full time series of modeled data (taken from Stopa et al. presentation at 2016 OSTST Meeting, La Rochelle).

3.2 Modelling activities

Wave model development and the assessment of the suitability of the necessary wind forcing is generally done by comparing model output to *in situ* observations, if available. However, it is seldom the case that one has enough *in situ* observations to cover the full extend of the model domain. For this reason, the wave modelling community relies extensively on the comparison of the model output with all available altimeter observations. Provided that the area covered by the model domain is large enough and that the period covered by the model simulation includes enough interesting weather, the statistical analysis of the model-altimeter along track collocations is a useful tool in development phase of the model as well as for assessment of the global characteristics of the modelling system (Wiese et al. 2018).

3.3 Remote sensing

Because ocean waves have clear signatures in most ocean remote sensing techniques, either adding noise or biases, stable corrections and detection is very important for:

- sea level estimates from altimetry (e.g. Tran et al. 2010, Passaro et al. 2018) and tide gauges (e.g. Aucan et al. 2012)
- glitter and foam contamination in ocean color imagery
- the surface mean square slope and foam cover and thickness are major sources of uncertainty in surface salinity retrieval (e.g. Reul and Chapron 2003).
- waves have an impact of retrieved wind speeds from all sensors (altimeters, scatterometers, radiometers), that is not fully understood despite recent attempts to reconcile these different records (Young and Donelan 2018).

3.4 Air-sea fluxes

Properties of the ocean and atmospheric mixed layers in which most human activity takes place, is largely driven by the air-sea exchanges of heat, water, momentum, gasses. These fluxes have been parameterized with resistance laws in which coefficients are often a function of wind speed alone. Additional dependencies on sea state properties have been strongly debated for the momentum flux (Drennan et al. 2005), while more recent analyses show a moderate impact for intermediate wind speeds (Edson et al. 2013), even though it is

expect that the surface roughness caused by waves should play a role (Donelan 2018) although one that is often correlated with the wind speed.

The impact of waves on upper ocean mixing and sea surface temperature is clear, in particular in cases of shallow mixed layers (e.g. Noh et al. 2011, Janssen 2012). This has important consequences on air-sea heat fluxes (Hansen et al. 2011).

Particular uncertainties in the climate systems are associated with cloud nucleation, which relies on marine aerosol production (e.g. Veron 2015) accounting for up to 30% of cloud nucleation (Quinn et al. 2018). The source functions for marine aerosols is expected to depend on sea state parameters, such as the height of breaking waves for which the significant wave height may be a good proxy away from the swell-dominated regions (de Leeuw et al. 2011).

3.5 Other wave-related effects in the Earth System

The interactions of waves and sea ice certainly influence ice edge dynamics and ice properties near the edge (Squire et al. 1995, Stopa et al. 2018). In particular, waves are associated with the formation of pancake ice (e.g. Doble et al. 2003) that is the most common type of ice formation in the Southern ocean, and is becoming increasingly important in the Arctic too (Thomson et al. 2018). Wave action over fragmented ice can have an important influence on the ice thickness (Sutherland and Dumont 2018).

4. User surveys

4.1 Introduction

In order to develop the Essential Climate Variables (ECVs) products for sea state, it is necessary to perform user surveys and analyse the requirements extracted from these surveys. During the phase 1 of the Sea State CCI project, two questionnaires were implemented in order to collect information on the user's experience with satellite wave data, the wave parameters they are mostly interested in, their requirements in terms of spatial resolution and time coverage, and their intention to use the data in relation with other ECVs. A third survey was circulated in February 2024. The main results are described in the following sections and any open comments from participants are listed in Appendix 1.

4.2 First user survey

The user survey was conducted from 10 February 2024 to 10 March 2024, using an online Google form (<https://forms.gle/r6qfBAduauGGjX2i6>) distributed on several mailing lists (including globwave users, IOWAGA users and the “coastal list” managed by the University of Delaware), as well as via Twitter.

4.2.1 Users involved in the survey

As of March October 4, 2024, a total of 99 participants had replied to the questionnaire. From this survey we see that the participants are mostly working in academic and research institutions (75%) spread all over the world (Figure 4.2.1, 4.2.2 and 4.2.3). The six most represented countries are France (16%), the UK (12%), Portugal (6%), Spain (6%), the USA (5%) and Italy (5 %). The remaining 50% of respondents work in a wide range of countries (Germany, The Netherlands, Bangladesh, China, Chile ...)

You: your professional situation
99 réponses

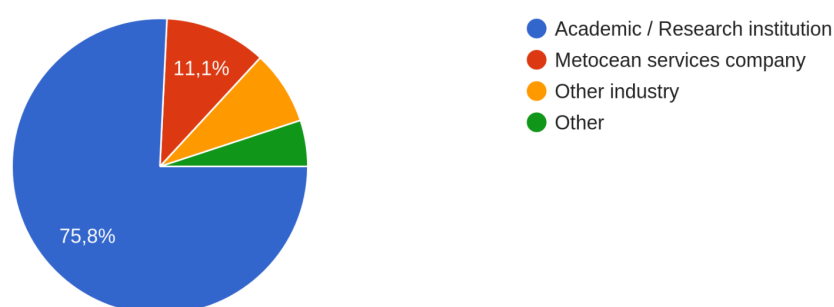


Figure 4.2.1. Professional situation of the participants

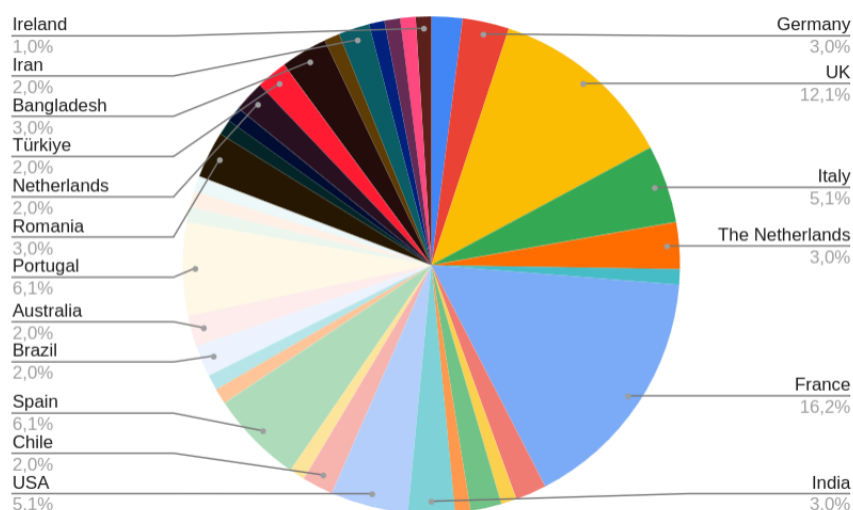


Figure 4.2.2. Countries where participants currently do most of their work (in blue)

This spatial distribution of the participants highlights the worldwide interest for high quality sea state information.

4.2.2 Field of applications

Survey participants needed to select one of a possible 10 fields of applications within which they worked. The results show that the majority of the participants are working in the field of oceanography (27%) and coastal engineering (24%). A significant fraction of participants working in the coastal geomorphology (12%) and marine renewable energy (14%) also took part in the survey (Figure 4.2.4).

2. You: what is your main field of applications

99 réponses

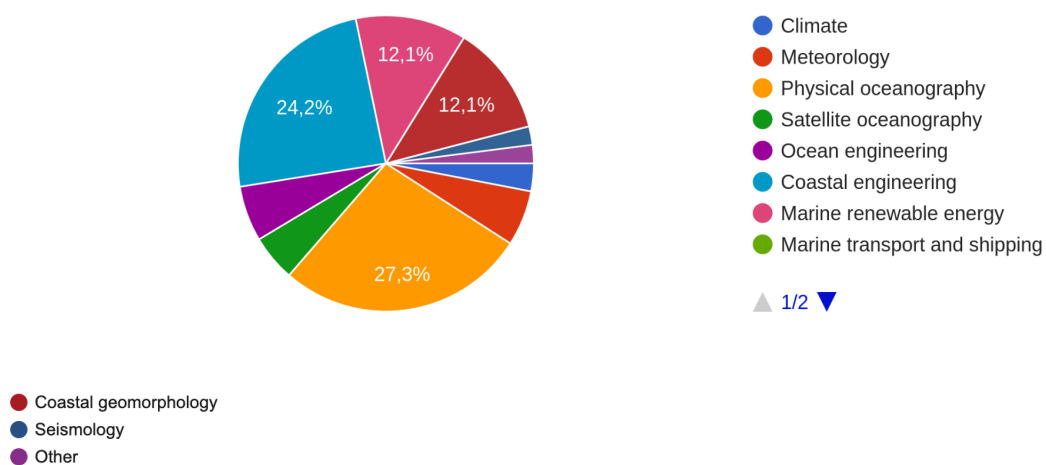


Figure 4.2.4. Distribution among the field of applications

4.2.3 The importance of various sea state parameters

The most important parameter for the quasi totality of the participants is **the significant wave height, followed by the wave periods (peak period T_p and mean period T_{m02} rather than the mean period T_{m01}) and the peak wave direction**. The 2-D wave spectrum $E(f,\theta)$ or $E(k,\theta)$ is also of interest for the majority of the participants, and overtakes the swell partition and the heave spectrum. Among the other altimetry-derived parameters, the mean square slope of the sea surface and the microseism sources are also relevant.

We note that in spite of being a very noisy parameter, the peak period T_p is still very much used by many.

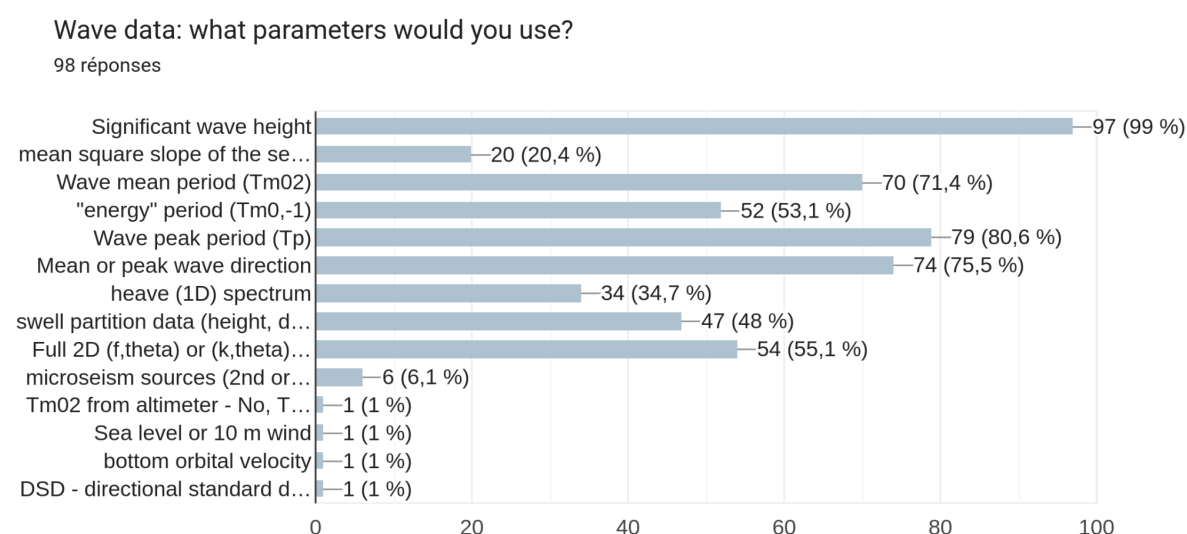


Figure 4.2.5 Sea state parameters that participants would like to use

4.2.4 Temporal coverage and spatial resolution

Figures 4.2.6 shows that **most participants are interested in multiple years and long term statistics**, although a significant fraction of the participants are also interested in less-than-a-year time-series (24%) and single event data (40 %).

Wave data: what is the time span for which you expect to use data?

99 réponses

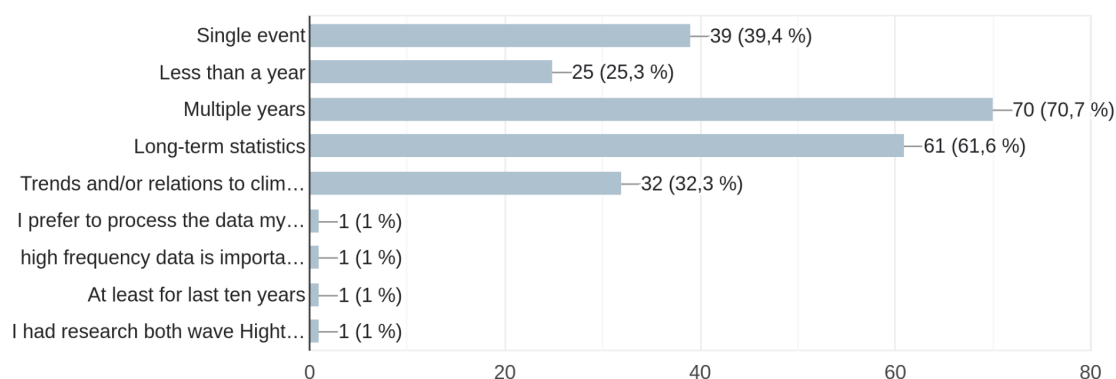


Figure 4.2.6 Period of time participants are interested in

It is clear that high spatial resolution data (<10km) is **of greater interest** to survey participants, compared to low resolution and single point measurements. This poses the question of the feasibility of such measurements (a single nadir altimeter pass is very noisy at those scales) or dedicated averaging (possible coastal higher resolution grid for L3 or L4 products). The newly available SAR-derived parameters will be very important in this context.

Wave data: what is the resolution at which you expect to use data?

99 réponses

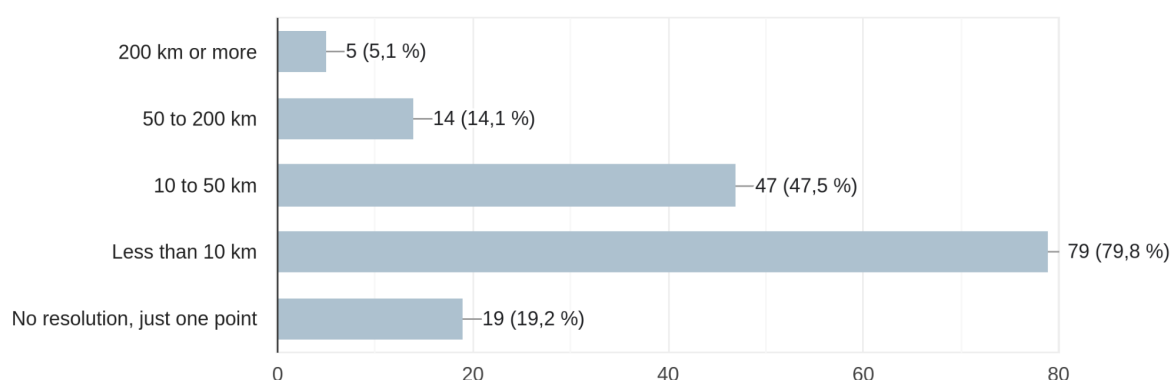


Figure 4.2.7 Spatial resolution at which participants expect to use the data

4.2.5 Interest in sea state data

Figure 4.2.8 reveals that **the major interest for satellite wave data concerns the study of extreme events, the validation of wave models and the study of coastal processes**. These three topics are followed by the study of *wave climate variability*, the study of *wave-current interactions*, the study of *air-sea interactions*, the study of *wave-ice interactions*, *data assimilation* and applications for *Marine Renewable Energy*. Other field of

interest were also proposed (not shown), such as: *statistical downscaling*, *machine learning*, *ship hydrodynamics*, *offshore engineering*, and *seismic ambient noise characterization*.

Wave data: your interest in satellite wave data concerns:

99 réponses

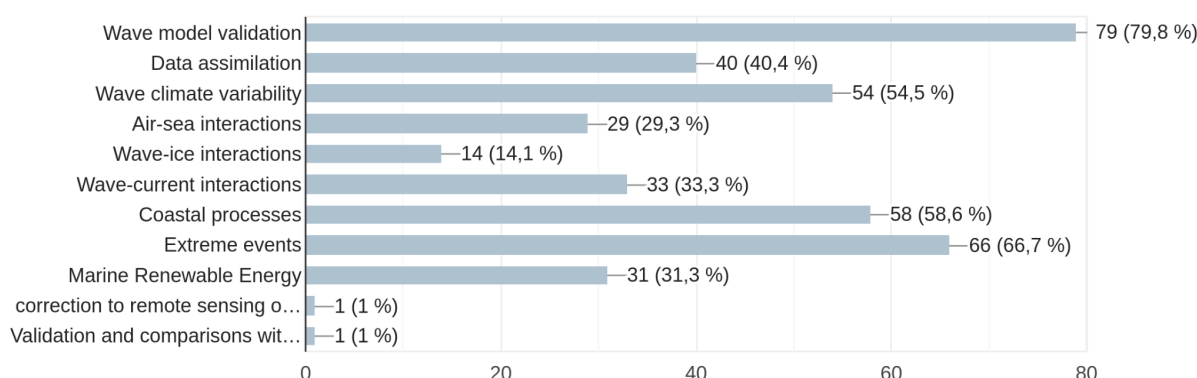


Figure 4.2.8 Answers to the question “your interest in satellite wave data concerns?”

4.2.6 Interest in other Essential Climate Variables

To the question “have you used or are you planning to use **other CCI variables?**”, 101 participants answered **Sea Level**, 33 participants answered **Ocean Color**, 54 participants answered **Salinity**, 69 participants answered **Sea Surface Temperature**, and 42 participants answered **Sea Ice**.

4.2.7 Participation to the User Consultation Meeting and training session

To the question “do you plan to attend the User Consultation Meeting (UCM) in Southampton, UK, (November 2025)?”, 31% of the participants answered “Definitely yes” or “Probably” (Figure 4.3.6).

We note that in a previous survey, many participants are interested in training sessions on *combining model and satellite data* (62%), *SAR data* (58%), *coastal altimetry* (56%), and *CFOSAT data* (29.5%). Hence, including a training session on one or several of the above-mentioned subjects to the User Consultation Meeting will likely attract more participants.

What next: do you plan to attend the User Consultation Meeting (UCM) in Southampton, UK, (November 2025)?

97 réponses

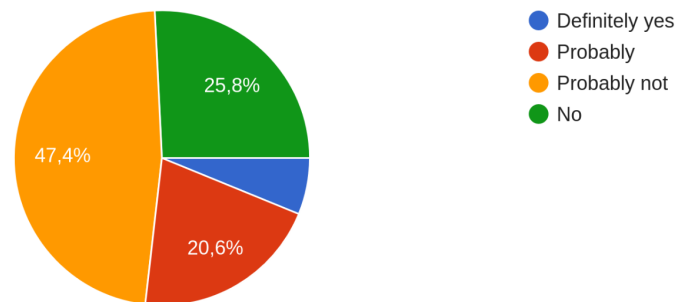


Figure 4.2.9 Interest of the participants in the User Consultation Meeting

Finally, the participants were asked about other CCI variables they planned to use. 72 of them answered and the **first choice is “Sea Level” (52), followed by SST (38) and Salinity (24)**. The other selected variables are: Ocean Colour (16) and sea ice (9).

5. Consolidated list of User Requirements

Based on the above material, we can highlight the relevant aspects of the user requirements for the CCI Sea State project. The specific data requirements as defined in the ESA Statement of Work are recalled in section 5.2, and are linked to the user requirements when appropriate.

5.1 Top level requirements

- **resolution:** There is a clear need for data at a resolution finer than the 25 km mentioned in GCOS, in particular in the coastal regions (here defined as the combination of depths under 100 m and distances to shore under 300 km). Most of the surveyed users would like to have **10 km or less**. Given the resolution of standard satellite processing, this is really calling for improved tracking and/or denoising algorithms, and by itself it justifies the effort made on the Sea State CCI.
- **coverage in space and time:** Given that a large fraction of users are interested into **single events** (80 out of 184 participants in the first survey), or considered that **spatial and temporal sampling are strongly or partly limiting the use of the data** (~40 out of 92 participants in the second survey), this clearly highlights the sampling issue of satellite data sets. Most events are missed, except through their associated swell fields. There is thus a need that will not be fully addressed in the Phase 1 of Sea State CCI for combining wave models and data or expanding on level 3 and 4 products such as fireworks, storm catalogs (associated with storm tracks ...). Regarding ice-covered regions, 49% of the participants of the second survey indicated they were interested in the polar region.

- **Stability:** not surprisingly most users identified here are interested into long-term statistics of sea state variable, with or without a climate change aspect. Given that many users (101/184 in survey 1 and 20/92 in survey 2) mentioned their intent to combine sea level with sea state, it is logical to reframe the requirements on sea state stability in terms of total sea level (e.g. Dodet et al., 2019, see also Ardhuin et al. 2019, Marcos et al. 2019). The **need** on wave height trend accuracy for mean values and extremes is thus **under 1 mm/year for coastal areas**, with a similar need for wave periods that should be quantified. It is not at all clear that such a low value can be achieved with today's spatial coverage, and how bringing models forced by winds with dubious trends can be used for this. At any rate, even the GCOS requirement of 5 cm/decade, when achieved, should be enough to confirm or disprove the 0.5% per year (around 1 cm per year) trend associated with wave power trends up to 2.5% per year reported by Reguero et al. (2019).
- **Sea State Variables:** It is not just the **wave heights**. For many reasons (energy flux, extreme sea levels...) the **full directional spectra**, or the **periods** and **directions** have a very important role, and this is well recognized in the user survey. It is thus very important to use both altimeters (via the cross-section) and wave-resolving instruments (SARs, SWIM on CFOSAT) for constraining the sea state climate. It may be surprising that fewer users would like to use partition data, but this may be due to the fact that little such data is available and the definition can be a bit fuzzy and method-dependent (e.g. Portilla et al. 2009). We will thus engage the user community (at UCM and through training events) on this question and see how the usefulness of such data can be improved. Given the very few users of SAR data, making the data more accurate and also more user-friendly is a key aspect.

5.2 Specific ESA stated data requirements

ID	Requirement description	Source	Comment
DR-001	In Phase 1 the Sea_state_cci project shall develop an initial 18-year data set (2002- 2020), and shall provide, as a minimum, L2 products and higher level merged product time-series that shall collectively include the following sea state variables: Significant wave height; Directional wave spectrum; Mean wave period; Peak wave period; Mean wave direction at the peak of the spectrum; Appropriate derived-variables and supporting variables; Other variables required by the Climate Science Community.	ESA TR-2, TR-15, TR-16	
DR-002	Each CCI project team (the contractor) shall integrate data from the Copernicus Sentinels and other key satellite missions within the relevant CCI processing systems and ECV data products.	ESA R-16	Sentinel 1, 3 & 6 included in baseline Sentinel 2 in option 10.
DR-003	Each CCI project team (the contractor) shall ensure that the system is adequately dimensioned to accommodate the	ESA R-17	

	growing volumes of input and output data, and the increasing computational loads needed to process, reprocess, quality control, validate, and disseminate multi-decadal, global, ECV data products, of the required climate quality, in a timely manner.		
DR-004	Sea_state_cci shall directly address GCOS Action O33.	ESA TR-1	
DR-005	The Sea_state_cci project shall develop and deliver Sea State ECV products primarily derived from satellite measurements.	ESA TR-7	
DR-006	The Sea_state_cci project shall deliver validated prototype products using agreed validation methods and metrics developed within a research environment to climate science users for assessment and feedback.	ESA TR-8	
DR-007	Sea_state_cci products shall cover the global ocean, including full coverage of both northern and southern hemispheres as far as possible.	ESA TR-9	
DR-008	All Sea_state_cci products shall cover the full mission lifetimes of the satellite missions selected.	ESA TR-10	
DR-009	Sea_state_cci products shall be available to users as Level-1 (where appropriate), Level-2 and Level-3 product versions, and potentially as higher-level derived products if required by the users.	ESA TR-11	
DR-010	Sea_state_cci products shall include aggregated versions of the data as required by climate science users (eg. daily, monthly, seasonally and annually).	ESA TR-12	
DR-011	Digital Object Identifiers (DOI) shall be assigned to all ECV data sets made publicly available.	ESA TR-13	
DR-012	As part of data merging methods, time-dependent and sampling biases in products from different instruments shall be investigated, and strategies shall be developed and implemented to correct for these effects.	ESA TR-17	WP2*70
DR-013	A common set of auxiliary/supporting data shall be developed and used for all satellite missions used within the Sea_state_cci project.	ESA TR-20	WP4200
DR-014	The Sea_state_cci project shall explore techniques using satellite measurements made at different frequencies (eg. C, S, Ku, Ka bands) to address GCOS Sea State ECV requirements.	ESA TR-22	
DR-015	The Sea_state_cci project shall develop innovative merging strategies and tools for sea state products generation.	ESA TR-23	WP2*70
DR-016	The Sea_state_cci project shall provide a validated estimate of uncertainty for each data product at product grid/pixel level using the approach of [ESA RD-33]. Uncertainties shall be reported within the ECV products for every geophysical measurement.	ESA TR-25, TR-39, TR-40	

DR-017	The method used to derive and validate uncertainties, the characteristics of those uncertainty estimates and advice on how uncertainty estimates are to be used for each product shall be fully reported in the PUG.	ESA TR-26	
DR-018	User requirements for ECV product uncertainties shall be included in the user requirements analysis, including how the uncertainties should be expressed and used in the Sea_state_cci ECV products (e.g. how should the uncertainties be broken down into their random and systematic components).	ESA TR-30	WP1000
DR-019	The Contractor shall conduct significant research and development and explore innovative approaches and algorithms that could address known weaknesses in sea state retrievals from satellite data sets.	ESA TR-31	WP2000
DR-020	The Contractor shall conduct research and development and explore new algorithms to address crossing seas.	ESA TR-33	
DR-021	The Contractor shall investigate and account for satellite instrument biases, particularly regarding earlier less well calibrated instruments taking account of changes in calibration with instrument aging.	ESA TR-35	
DR-022	Based on the outcome of the Round Robin, The contractor shall select a set of definitive retrieval algorithms to be applied to data from different instruments.	ESA TR-36, TR-37, TR-38	WP2100
DR-023	The Contractor shall ensure the new capabilities of Copernicus Sentinel-3 SRAL (and in future Copernicus Sentinel-6) SAR altimeter instruments are fully exploited for the retrieval of sea state ECV products.	ESA TR-41	
DR-024	The Contractor shall ensure the new capabilities of Copernicus Sentinel-1 SAR imager instruments are fully exploited for the retrieval of the sea state ECV products.	ESA TR-42	
DR-025	A full validation of all sea state ECV products produced shall be performed against metrics pre-defined defined by the contractor and endorsed by the user community.	ESA TR-43, TR-44	WP4500
DR-026	Validation shall quantify the uncertainty of the sea state ECV products as well as the quality of the product uncertainty estimates themselves.	ESA TR-45	WP4500
DR-027	The long-term stability of all ECV time series delivered shall be assessed.	ESA TR-46	WP4500
DR-028	A database of relevant and ideally independent <i>in situ</i> Fiducial Reference Measurements and satellite measurements (ISDB) shall be developed to serve the Sea_state_cci project validation, research and development needs.	ESA TR-47	WP4100
DR-029	All measurements in the ISDB shall include uncertainty estimates. The methods used to derive and validate ISDB uncertainties and the characteristics of those uncertainty	ESA TR-48, TR-50	

	estimates for each product shall be fully reported in the PUG.		
DR-030	The suite of Sea_state_cci ECV products produced shall be made publicly available together with the validation results immediately following the completed validation.	ESA TR-54	

6. References

- Allen, P. A. and Hoffman, P. F., "Extreme winds and waves in the aftermath of a neoproterozoic glaciation," *Nature*, 433, 123–127, 2005. See commentary by D. J. Jerolmack and D. Mohrig, *Nature*, 2005, vol. 436, p. E1.
- Ardhuin, F., Drake, T. G., and Herbers, T. H. C., "Observations of wave-generated vortex ripples on the North Carolina continental shelf," *J. Geophys. Res.*, 107, C10, 2002. doi:10.1029/2001JC000986.
- Ardhuin, F., Ocean waves in geosciences. 2024. doi:10.13140/RG.2.2.16019.78888/11.
- [Ardhuin, F., J. E. Stopa](#), B. Chapron, F. Collard, [R. E. Jensen](#), [J. Johannessen](#), R. Husson, A. Mouche, [M. Passaro](#), [G. Quartly](#), [V. Swail](#) and [I. Young](#), Observing sea states, *Frontiers in Marine Science* (2019). <https://doi.org/10.3389/fmars.2019.00124>
- Ashton, A., Murray, A. B., and Arnault, O., "Formation of coastline features by large-scale instabilities induced by high-angle waves," *Nature*, 414, 296–299, 2001. doi:10.1038/35104541.
- Aster, R. C., Ringler, A. T., Anthony, R. E., & Lee, T. A. (2023). Increasing ocean wave energy observed in Earth's seismic wavefield since the late 20th century. *Nature Communications*, 14(1), 6984.
- Aucan, J., Hoeke, R., Merrifield, M.A., 2012. Wave-driven sea level anomalies at the Mid-way tide gauge as an index of North Pacific storminess over the past 60 years. *Geophys. Res. Lett.* 39, 1–6. <http://dx.doi.org/10.1029/2012GL052993> .
- Aucan, J., Hoeke, R. K., Storlazzi, C. D., Stopa, J., Wandres, M., & Lowe, R. (2019). Waves do not contribute to global sea-level rise. *Nature Climate Change*, 9(1), 2-2.
- Autret, R., Dodet, G., Fichaut, B., Suanez, S., David, L., Leckler, F., Ardhuin, F., Ammann, J., Grandjean, P., Lallemand, P., and Filipot, J.-F., "A comprehensive hydro-geomorphic study of cliff-top storm deposits on Banneg island during winter 2013-2014," *Marine Geology*, 382, 37–55, 2016. doi:10.1016/j.margeo.2016.09.014.
- Bernard, P., "Historical sketch of microseisms from past to future," *Phys. Earth Planetary Interiors*, 63, 145–150, 1990. doi:0031-9201(90)90013-N.
- Bouchette, F., Schuster, M., Ghienne, J.-F., Denamiel, C., Roquin, C., Moussa, A., Marsaleix, P., and Düringer, P., "Hydrodynamics in holocene lake mega-chad," *Quaternary Research*, 73, 226–236, 2010. doi:10.1016/j.yqres.2009.10.010.
- Casas-Prat, M., Hemer, M. A., Dodet, G., Morim, J., Wang, X. L., Mori, N., ... & Feng, Y. (2024). Wind-wave climate changes and their impacts. *Nature Reviews Earth & Environment*, 5(1), 23-42.
- Cox, R., "Very large boulders were moved by storm waves on the west coast of Ireland in winter 2013–2014," *Marine Geology*, p. in press, 2018. doi:10.1016/j.margeo.2018.07.016.
- Cronin, M. F., Swart, S., Marandino, C. A., Anderson, C., Browne, P., Chen, S., ... & Yu, L. (2023). Developing an observing air–sea interactions strategy (OASIS) for the Global Ocean. *ICES Journal of Marine Science*, 80(2), 367-373.

de Leeuw, G., E. L. Andreas, M. D. Anguelova, C. W. Fairall, E. R. Lewis, C. O'Dowd, M. Schulz, and S. E. Schwartz (2011), Production flux of sea spray aerosol, *Rev. Geophys.*, 49, RG2001, doi:10.1029/2010RG000349.

Doble, M. J. (2003). *Pancake ice formation in the Weddell Sea. Journal of Geophysical Research*, 108(C7). doi:10.1029/2002jc001373

Dodet, G., Leckler, F., Sous, D., Ardhuin, F., Filipot, J. F., & Suanez, S. (2018). *Wave Runup Over Steep Rocky Cliffs. Journal of Geophysical Research: Oceans*. doi:10.1029/2018jc013967

Dodet, G., Melet, A., Ardhuin, F., Bertin, X., Idier, D., & Almar, R. (2019). The contribution of wind-generated waves to coastal sea-level changes. *Surveys in Geophysics*, 40(6), 1563-1601.

Donelan, M. A., "On the decrease of the oceanic drag coefficient in high winds," *J. Geophys. Res.*, 123, C2, 1485–1501, 2015. doi:10.1002/2017JC013394.

ESA, GMES Sentinel 3 Mission Requirements Document, ESA document EOP-SMO/1151/MD-md issue 1.0, 2004.

GCOS, (WMO/TD No. 1143), The Second Report on the Adequacy of the Global Observing Systems for Climate in Support of the UNFCCC, 2003.

GCOS, 2006. SYSTEMATIC OBSERVATION REQUIREMENTS FOR SATELLITE-BASED DATA PRODUCTS FOR CLIMATE. Supplemental details to the satellite-based component of the "Implementation Plan for the Global Observing System for Climate in Support of the UNFCCC (GCOS – 92)".

GCOS, 2011. SYSTEMATIC OBSERVATION REQUIREMENTS FOR SATELLITE-BASED DATA PRODUCTS FOR CLIMATE, 2011 Update. Supplemental details to the satellite-based component of the "Implementation Plan for the Global Observing System for Climate in Support of the UNFCCC (2010 Update)" December 2011, **GCOS – 154**.

Gerling, T. W., "Partitioning sequences and arrays of directional ocean wave spectra into component wave systems," *J. Atmos. Ocean Technol.*, 9, 444–458, 1992.

Golding, B.W., S. Senesi, K. Browning, B. Bizzarri, W. Benesch, D. Rosenfeld, V. Levizzani, H. Roesli, U. Platt, T. E. Nordeng, J. T. Carmona, P. Ambrosetti, P. Pagano, and M. Kurz, EUMETSAT Position Paper on Observation Requirements for Nowcasting & Very Short Range Forecasting in 2015-2025, *V11 2* (2003): 02-12.

Grevemeyer, I., Herber, R., and Essen, H.-H., "Microseismological evidence for a changing wave climate in the northeast Atlantic Ocean," *Nature*, 408, 349–351, 2000.

Hansen, J., Sato, M., Kharecha, P., & von Schuckmann, K. (2011). *Earth's energy imbalance and implications. Atmospheric Chemistry and Physics*, 11(24), 13421–13449. doi:10.5194/acp-11-13421-2011

Hansen, J., Sato, M., Hearty, P., Ruedy, R., Kelley, M., Masson-Delmotte, V., Russell, G., Tselioudis, G., Cao, J., Rignot, E., Velicogna, I., Tormey, B., Donovan, B., Kandiano, E., von Schuckmann, K., Kharecha, P., Legrande, A. N., Bauer, M., and Lo, K.-W., "Ice melt, sea level rise and superstorms: evidence from paleoclimate data, climate modeling, and modern observations that 2°C global warming could be dangerous," *Atmos. Chem. Phys.*, 16, 3761–3812, 2016. doi:10.5194/acp-16-3761-2016.

- Hanson, J. L. and Phillips, O. M., "Automated analysis of ocean surface directional wave spectra," J. Atmos. Ocean Technol., 18, 277–293, 2001.
- Hauser, D., et al. (COST Action 714 Working Group 3) Measuring and analysing the directional spectra of ocean waves. Office for Official Publications of the European Communities, Luxembourg, 2005. ISBN 92-898-0003-8.
- Jähne, B. and Haussecker, H., "Air-water gas exchange," Annu. Rev. Fluid Mech., 30, 443–469, 1998.
- Kennedy, A. B., Mori, N., Zhang, Y., Yasuda, T., Chen, S.-E., Tajima, Y., Pecor, W., and Toride, K., "Observations and modeling of coastal boulder transport and loading during super typhoon haiyan," Coastal Eng. Japan, 58, p. 1640004, 2016. doi:10.1142/S0578563416400040.
- Law-Chune, S., Aouf, L., Dalphiné, A., Levier, B., Drillet, Y., & Drevillon, M. (2021). WAVERYS: a CMEMS global wave reanalysis during the altimetry period. *Ocean Dynamics*, 71, 357-378.
- Leckler, F., Ardhuin, F., Peureux, C., Benetazzo, A., Bergamasco, F., & Dulov, V. (2015). Analysis and interpretation of frequency–wavenumber spectra of young wind waves. *Journal of Physical Oceanography*, 45(10), 2484-2496.
- Lygre, A., and H. E. Krogstad, 1986: Maximum entropy estimation of the directional distribution in ocean wave spectra. *J. Phys. Oceanogr.*, 16, 2052–2060.
- Marcos, M., Wöppelmann, G., Matthews, A., Ponte, R. M., Birol, F., Ardhuin, F., ... Stopa, J. E. (2019). Coastal Sea Level and Related Fields from Existing Observing Systems. *Surveys in Geophysics*. doi:10.1007/s10712-019-09513-3
- Melet, A., Meyssignac, B., Almar, R., & Le Cozannet, G. (2018). Under-estimated wave contribution to coastal sea-level rise. *Nature Climate Change*, 8(3), 234-239.
- Meyssignac, B., Ablain, M., Guérou, A. *et al.* How accurate is accurate enough for measuring sea-level rise and variability. *Nat. Clim. Chang.* **13**, 796–803 (2023). <https://doi.org/10.1038/s41558-023-01735-z>
- Munk, W. (2009). An inconvenient sea truth: Spread, steepness, and skewness of surface slopes. *Annual review of marine science*, 1, 377-415.
- Nouguier, F., Mouche, A., Rascle, N., Chapron, B., & Vandemark, D. (2016). Analysis of dual-frequency ocean backscatter measurements at Ku-and Ka-bands using near-nadir incidence GPM radar data. *IEEE Geoscience and Remote Sensing Letters*, 13(9), 1310-1314.
- Passaro, M., Z. A. Nadzir, G. D. Quartly, Improving the precision of sea level data from satellite altimetry with high-frequency and regional sea state bias corrections, *Remote Sensing of Environment* 218 (2018) 245–254, doi: /10.1016/j.rse.2018.09.007
- Poate, T. G., McCall, R. T., and Masselink, G., "A new parameterisation for runup on gravel beaches," Coastal Eng., 117, 176–190, 2016.
- Reguero, B. G., Losada, I. J., & Méndez, F. J. (2019). *A recent increase in global wave power as a consequence of oceanic warming. Nature Communications*, 10(1). doi:10.1038/s41467-018-08066-0

- Reul, N. and Chapron, B., "A model of sea-foam thickness distribution for passive microwave remote sensing applications," J. Geophys. Res., 108, C10, p. 3321, 2003. doi:10.1029/2003JC001887.
- Semedo, A., Sušelj, K., Rutgersson, A., Sterl, A., 2010. A Global View on the Wind Sea and Swell Climate and Variability from ERA-40. Journal of Climate 24, 1461–1479. <https://doi.org/10.1175/2010JCLI3718.1>
- Shapiro, N. M., Campillo, M., Stehly, L., and Ritzwoller, M. H., "High-resolution surface-wave tomography from ambient seismic noise," Science, 307, 1615–1617, 2005. doi:10.1111/j.1365-246X.2006.03240.x.
- Shimura, T., Mori, N., and Hemer, M. A., "Variability and future decreases in winter wave heights in the western north pacific," Geophys. Res. Lett., 43, 2716–2722, 2016. doi:10.1002/2016GL067924.
- Stopa, J. E., Ardhuin, F., and Girard-Ardhuin, F., "Wave climate in the arctic 1992-2014: seasonality and trends," The Cryosphere, 10, 1605–1629, 2016. doi:10.5194/tc-10-1605-2016.
- Squire, V., Dugan, J., Wadhams, P., Rottier, P., and Liu, A., "Of ocean waves and sea ice," Annu. Rev. Fluid Mech., 27, 3, 115–168, 1995.
- Stopa, J., P. Sutherland, F. Ardhuin, Strong and highly variable push of ocean waves on Southern Ocean sea ice, Proc. Nat. Acad. Sci., 115(23), 5861-5865, doi :10.1073/pnas.1802011115
- Sutherland, P., D. Dumont, Marginal ice zone thickness and extent due to wave radiation stress, 2018, J. Phys. Oceanogr., doi : 10.1175/JPO-D-17-0167.1
- Thomson, J., S. Ackley, F. Girard-Ardhuin, F. Ardhuin, A. Babanin, G. Boutin, J. Brozena, S. Cheng, C. Collins, M. Doble, C. Fairall, P. Guest, C. Gebhardt, J. Gemmrich, H. C. Graber, B. Holt, S. Lehner, B. Lund, M. H. Meylan, T. Maksym, F. Montiel, W. Perrie, O. Persson, L. Rainville, W. E. Rogers, H. Shen, H. Shen, V. Squire, S. Stammerjohn, J. Stopa, M. M. Smith, P. Sutherland, P. Wadhams, Overview of the Arctic Sea State and Boundary Layer Physics Program, J. Geophys. Res., 2018. doi :10.1002/2018JC013766
- Tran, N., Vandemark, D., Labroue, S., Feng, H., Chapron, B., Tolman, H. L., Lambin, J., and Picot, N., "The sea state bias in altimeter sea level estimates determined by combining wave model and satellite data," J. Geophys. Res., 115, p. C03020, 2010. doi:10.1029/2009JC005534.
- Veron, F., "Sea spray," Annu. Rev. Fluid Mech., 47, 507–538, 2015. doi:10.1146/annurev-fluid-010814-014651.
- Wiese, A., Staneva, J., Schulz-Stellenfleth, J., Behrens, A., Fenoglio-Marc, L., and Bidlot, J.-R.: Synergy of wind wave model simulations and satellite observations during extreme events, Ocean Sci., 14, 1503-1521, <https://doi.org/10.5194/os-14-1503-2018>, 2018.
- I. R. Young, et al. (2011), Global Trends in Wind Speed and Wave Height, Science 332, 451 (2011); <https://doi.org/10.1126/science.1197219>
- Young, I. R., & Donelan, M. A. (2018). *On the determination of global ocean wind and wave climate from satellite observations. Remote Sensing of Environment*, 215, 228–241. doi:10.1016/j.rse.2018.06.006
- Young, I. R., & Ribal, A. (2022). Can multi-mission altimeter datasets accurately measure long-term trends in wave height?. *Remote Sensing*, 14(4), 974.

Appendix 1 - Open comments from survey participants

First survey

- *Right now I am just a peripheral user of satellite data. However me and my group are planning to use this data more, as we would like to widen our wave observations away from single buoy / point observations.*
- *Thanks for the work done*
- *Keen to try your product soon*
- *At this stage, I'm still trying to process the satellite data that I downloaded on the CMEMS server (Jason 3 along track significant wave height) and once I'm done with that, I will be to comment and make suggestions when needed.*
- *I've never used satellite measurements but would be interested in possible applications in the nearshore*
- *The satellite data are not open data, their availability depends on the country of satellite ownership, the country of user's residency, the nature of the organizations of all the interested parties and more.*
- *hope it works well for u!*
- *The datasets produced by the CCI might last for a decade so it is important to make the most of the project and ensure all parties (users, scientists, engineers, industry, ...) are satisfied as best as possible.*
- *I feel rather out of touch, due to other work commitments, but very happy to see all of this happening and I hope to be more involved later*
- *Nice survey.*
- *thanks for collecting this information*
- *thanks*
- *Thank you so much for the initiative. I really appreciate it!*
- *Thank you for the great work you do.*
- *None*
- *Thanks for the great work you are doing in this interdisciplinary area. Two further comments in support of your excellent work in this area:*
 - 1 - if an interdisciplinary user like me / my group members / isn't using a product it might be because they didn't know about it yet.*
 - 2 – with data-driven (e.g. machine learning) approaches, we just need lots of data and not to worry too much about each individual type of observable. Sometimes it is better not to pre-empt what is a useful observable.*
- *It would be great to have a page with a list of data sources for all available historical and NRT SAR L2, L3 datasets including ERS-1/2, Envisat, and Sentinel-1A/B together with their pros and cons (e.g. good quality/bad quality/no quality), similarly for buoy data (both directional and otherwise) and also for altimetry data.*
- *Just a single summary page of links and pros and cons of using the data.*
- *I would prefer to have access to raw (less smooth) data, and do my own processing to them.*

- *It will have a great deal if one can be able to validate the wave models with the satellite data*
- *I'm not sure about merged altimeter data provided by IFREMER. But I contacted the concerned person I didn't receive any response. Then it's like use with your own risk. Can someone help me with my doubts in data inhomogeneity issues?*

Second user survey

19. If you haven't used the CCI products yet, what is the main reason? [Comment]

- *But going to use them soon*
- *Don't know if it's useful for this application*
- *Hadn't thought about it*
- *Have not decided the best way to use it yet*
- *I already used Globwave data and CMEMS satellite data*
- *I did not know about the dataset*
- *I didn't have the chance yet but I am planning to use.*
- *I didn't know about the existence of this data*
- *I may want this data as the project progresses to a later stage*
- *I was not aware about the existence of this data set*
- *I will probably use it in the next future*
- *just find out that they are exist*
- *Not had time yet!*
- *Operational mission with limited time, however, future activities we will consider.*
- *other set available*
- *Unaware until recently*

27. What sort of statistics would you like to find in a higher level product (gridded summary products)? [Comment]

- *Benjamin & Feir index, cross seas index*
- *Bias, R, RMSE, SI*
- *Monthly max, seasonal max*
- *Will derive from time series*

28b You have indicated that you plan to combine Sea State CCI data with other CCI variables. Would you like to see improved inter-operability between these datasets? [Comment]

- *Consistency of sea ice / open water classification. Potential wave propagation and dampening in marginal sea ice zones.*
- *Improving the precision of sea level data from satellite altimetry with high-frequency and regional sea state bias corrections*

29. Do you see any information that is missing from the metadata and that you would like to see in future versions?

- *The present "Sea state CCI Product User Guide, V1.0" has a comprehensive list of variables for all datasets (L2P, L3, L4). However, a clear definition of all variables is not given, for example, what is the meaning (in L4) of a monthly value for "sw_h_mean: mean of median significant wave height values"? (In this example, what and how is being averaged?, I guess one averages several values of median_sw_h,*

but is it a spatial average or a temporal average). So, my suggestion goes to include in an Annex a clear mathematical/physical definition of all variables.

30. Do you have any other suggestions?

- *I downloaded the data rapidly with no difficulties, keep on!*
- *I would suggest to make the CCI data sets available through CMEMS and other major metocean portals. This could allow to increase the dissemination. An coordination with CMEMS to better highlight the complementarities between ESA CCI and CMEMS sea state satellite product would be also useful.*
- *More frequent data releases, even if the data are experimental only (to keep up with rapid developments in other projects and countries)*
- *Provide the inter-satellite cross-over database (for altimeter vs.SAR, altimeter vs. wave scatterometer and SAR vs. wave scatterometer) for further analysis of possible synergistic new sea state products*
- *Since the "swh_denoised" is the swh best estimate from the data, I suggest to provide solely this variable, as providing the others can be confusing and misleading.*
- *Some questions in the survey seemed to ignore the existence of level-4 products, which are the only ones I have used so far. For instance, one question only had L1, L2 and L3 as possible answers. The next one I think was asking whether we use raw or denoised/corrected SWH, but this is not relevant for L4 data, which, as far as I understand, only provide denoised/corrected SWH.*
- *Question 28. has an issue: I haven't found boxes for Yes/No answer, but then 28b assumes that I ticked Yes (28a nowhere in sight). Actually, my answer to this question is No. So I had no other choice than not providing answers to either 28 or 28b.*
- *Thank you for your work!*